



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification <sup>6</sup> : <b>H04L 5/06, H04N 7/06</b></p>	<p><b>A1</b></p>	<p>(11) International Publication Number: <b>WO 99/17492</b></p> <p>(43) International Publication Date: 8 April 1999 (08.04.99)</p>
<p>(21) International Application Number: PCT/KR98/00299</p> <p>(22) International Filing Date: 28 September 1998 (28.09.98)</p> <p>(30) Priority Data: 1997-50377 30 September 1997 (30.09.97) KR</p> <p>(71) Applicant (for all designated States except US): SAMSUNG ELECTRONICS CO., LTD. [KR/KR]; 416, Maetan-dong, Paldal-gu, Suwon-city, Kyungki-do 442-373 (KR).</p> <p>(72) Inventors; and (75) Inventors/Applicants (for US only): DO, Sang, Hyun [KR/KR]; 27-611, Jangmi Apt., 11, Shinchun-dong, Songpa-gu, Seoul 138-240 (KR). KIM, Dong, Kyu [KR/KR]; 1055-66, Kwangan 1-dong, Sooyoung-gu, Pusan-city 613-101 (KR). CHOI, Hyung, Jin [KR/KR]; 10-405, Asia Sunsoochon Apt., 86, Chamsil-dong, Songpa-gu, Seoul 138-220 (KR).</p> <p>(74) Agent: LEE, Young, Pil; The Cheonghwa Building, 1571-18, Seocho-dong, Seocho-gu, Seoul 137-073 (KR).</p>		<p>(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, HR, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).</p> <p><b>Published</b> <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i></p>
<p>(54) Title: GUARD SECTION LENGTH DETECTING DEVICE AND METHOD FOR ORTHOGONAL FREQUENCY DIVISION MULTIPLEXING SYSTEM RECEIVER</p> <div data-bbox="446 1186 1144 1554"> </div> <p>(57) Abstract</p> <p>An apparatus for detecting a guard interval length (type) of a transmission symbol among the structure of an orthogonal frequency division multiplexing (OFDM) system receiver, to ensure proper operation of a symbol start detector (320) and a fast Fourier transform (FFT) window position controller (360), is provided. This apparatus includes an analog-to-digital converter (ADC) (310) for converting a received OFDM signal into digital complex samples, a symbol start position detector (320) for detecting a symbol start position with reference to information on a guard interval length among the complex samples output by the ADC (310), a symbol start position difference detector (330) for detecting the difference between the symbol start position detected by the symbol start position detector (320) and a symbol start position delayed for a predetermined symbol time, a guard interval length detector (340) for comparing the symbol start position difference detected by the symbol start position difference detector (330) with a predetermined guard interval decision reference value and detecting the length of the guard interval, and an FFT window position controller (360) for shifting the FFT window position using the guard interval length detected by the guard interval length detector (340) and the symbol start information detected by the symbol start detector (320), to activate an FFT at the shifted FFT window position. The lengths of various guard intervals are automatically detected in the OFDM receiver, thus performing accurate FFT window recovery.</p>		

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

**GUARD SECTION LENGTH DETECTING DEVICE AND METHOD  
FOR ORTHOGONAL FREQUENCY DIVISION MULTIPLEXING SYSTEM  
RECEIVER**

5    Technical Field

The present invention relates to an orthogonal frequency division multiplexing (OFDM) system, and more particularly, to a device and method for detecting a guard interval length in an OFDM receiver.

10   Background Art

FIG. 1 is a block diagram of a receiver in a general OFDM system, including an analog-to-digital converter (ADC) 110, a symbol start detector 120, a fast Fourier transform (FFT) window position controller 130, and a fast Fourier transformer (FFT) 140.

15       First, considering a symbol of an OFDM signal, when N subcarriers are used in an OFDM system, the symbol is comprised of N useful data samples as the output of an inverse fast Fourier transform (IFFT) for transmission, and a guard interval having G sample lengths to be inserted before a useful data section to prevent interference between symbols.

20       Here, the guard interval copies the end portion of the useful data section. A transmitter (not shown) adds G complex values to N complex values output by an inverse fast Fourier transformer (IFFT), and sequentially transmits a symbol comprised of a total of (G+N) samples.

      Here, the guard interval is generally longer than a delay spread time  
25   of a channel. For example, a European digital TV broadcasting standard defines a guard interval having a length of 1/4, 1/8, 1/16 or 1/32 (hereinafter, called a 1/4 mode, a 1/8 mode, a 1/16 mode, and a 1/32 mode) of an actual symbol length. A transmitting side selects a length among these and uses the selected length. A receiver must perform accurate time synchronization  
30   to recover a received OFDM signal. The time synchronization is comprised of FFT window position recovery for parallel processing of an accurate signal, and sampling clock recovery for controlling a sampling clock of a

received signal having a maximum signal-noise-ratio (SNR).

$$S_j = \sum_{n=-G}^{N-1} X_{j,n} = \sum_{n=-G}^{-1} \sum_{k=0}^{N-1} X_{j,k} e^{j2\pi(N \cdot n)/N} + \sum_{n=0}^{N-1} \sum_{k=0}^{N-1} X_{j,k} e^{j2\pi kn/N} \quad \dots(1)$$

Equation 1 expresses a j-th symbol comprised of a useful interval and a guard interval which are output by an IFFT (not shown) of a transmitter. Here, j denotes a symbol number, k is a carrier index, N is the number of useful data samples, n indicates a sampling time, and X(•) and x(•) respectively denote an input complex value and an output complex value of the transmission IFFT. In the right side of Equation 1, the first term is a guard interval portion and the second term is a useful data portion.

As shown in FIG. 1, the ADC 110 samples a received OFDM signal. The symbol start detector 120 detects information on a start portion of a symbol using the type of guard interval and the sampled OFDM signal. The FFT window controller 130 designates an FFT window point in time to activate the useful data portion of the FFT 140 using length information on the guard interval and length information of the symbol start portion detected by the symbol start detector 120. However, a device for detecting information on the length of the guard interval has been developed up to now, and thus correct operation of the symbol start detector 120 and the FFT window controller 130 cannot be ensured.

## 20 Disclosure of the Invention

It is an objective of the present invention to provide a method of detecting the length of a guard interval, whereby accurate FFT window recovery is performed by automatically searching for the length of the guard interval by calculating the difference between symbol start points in time in an OFDM receiver.

It is an objective of the present invention to provide a device for detecting the length of a guard interval, whereby accurate FFT window recovery is performed by automatically searching for the length of the guard interval by calculating the difference between symbol start points in time in

an OFDM receiver.

To achieve the first objective, there is provided a method of detecting the type of guard interval to recover a symbol start position in an orthogonal frequency division multiplexing (OFDM) receiver for receiving an OFDM symbol comprised of a useful data interval and a guard interval, the method comprising the steps of: (a) detecting the difference between a symbol start position of a received OFDM signal and a symbol start position delayed during at least two symbols; and (b) detecting the length of the guard interval by comparing the symbol start position difference detected by the step (a) to a predetermined guard interval decision reference value.

To achieve the second objective, there is provided an apparatus for detecting the type of guard interval in an orthogonal frequency division multiplexing (OFDM) receiver for receiving an OFDM symbol comprised of useful data interval and a guard interval, to recover a fast Fourier transform (FFT) window position, the apparatus comprising: an analog-to-digital converter (ADC) for converting a received OFDM signal into digital complex samples; a symbol start position detector for detecting a symbol start position with reference to information on a guard interval length among the complex samples output by the ADC; a symbol start position difference detector for detecting the difference between the symbol start position detected by the symbol start position detector and a symbol start position delayed for a predetermined symbol time; a guard interval length detector for comparing the symbol start position difference detected by the symbol start position difference detector with a predetermined guard interval decision reference value and detecting the length of the guard interval; and an FFT window position controller for shifting the FFT window position using the guard interval length detected by the guard interval length detector and the symbol start information detected by the symbol start detector, to activate an FFT at the shifted FFT window position, wherein the symbol start position difference detector comprises: a symbol delay for delaying by two symbols the symbol start position detected by the symbol start position detector; and a subtractor for calculating the difference between the symbol start position

detected by the symbol start position detector and the symbol start position output by the symbol delay.

#### Brief Description of the Drawings

5 FIG. 1 is a block diagram illustrating the configuration of a general OFDM system receiver;

FIG. 2 is a block diagram illustrating an FFT window position recovering apparatus in an OFDM system receiver according to the present invention; and

10 FIG. 3 is a timing view illustrating the transition of a symbol start position according to a guard interval mode (1/32 mode, 1/16 mode, 1/8 mode, or 1/4 mode).

#### Best mode for carrying out the Invention

15 Referring to FIG. 2, an FFT window position recovering apparatus includes an ADC 310, a symbol start position detector 320, a symbol start position difference detector 330, a guard interval length detector 340, an FFT window position controller 360, and an FFT 370. The symbol start position difference detector 330 is comprised of a symbol delay 332, a subtractor 334  
20 and an absolute value calculator 336.

Referring to FIG. 3, a detection period corresponds to the length of an OFDM symbol in a 1/32 mode, and is repeated in units of 2112 samples being the sum of a guard interval and a useful data interval. The symbol start position detector 320 detects a symbol start position in this detection  
25 period. A greyed portion in the detection period is a guard interval, and the remaining portion is a useful data interval.

The operation and effects of the present invention will now be described referring to FIGS. 2 and 3.

30 As shown in FIG. 2, the ADC 310 samples an input OFDM signal and converts the sampled OFDM signal into digital data as expressed by the following Equation 2:

$$y(k) = y(t), t = kT \quad \dots(2)$$

wherein  $\gamma(k)$  is a sampled complex signal,  $\gamma(t)$  is a received OFDM signal,  $k$  is an integer (0, 1, 2, ...), and  $T$  is a regular sample period of the ADC 310.

The symbol start position detector 320 detects a symbol starting portion using a method of finding a maximum position of a correlation value between received complex signals  $\gamma(k)$  or finding a point in time where the correlation value between quantized received signal values is maximum. Also, the symbol start position detector 320 detects the symbol start position when the length of a guard interval is set to a minimum length (a 1/32 mode in this embodiment). Here, the position of an output obtained by consecutively detecting the guard interval length is shifted at a regular interval in cases other than when the actual length of the guard interval is the 1/32 mode. That is, as shown in FIG. 3, when the guard interval is the 1/32 mode, no position shift occurs between symbol start positions (between a previous symbol start position and the next symbol start position). When the guard interval is the 1/16 mode, the position of the guard interval is shifted by 1/32 of the useful data interval between the symbol start positions (between a previous symbol start position and the next symbol start position). When the guard interval is the 1/8 mode, the position of the guard interval is shifted by 3/32 of the useful data interval between the symbol start positions (between a previous symbol start position and the next symbol start position). When the guard interval is the 1/4 mode, the position of the guard interval is shifted by 7/32 of the useful data interval between the symbol start positions (between a previous symbol start position and the next symbol start position). However, in an actual receiving environment, additive white gaussian noise (AWGN), multi-path channel distortion, etc. have influence, so that the position shift between adjacent symbols is made at inaccurate intervals, and the distribution of position shift intervals capable of occurring according to the mode of each guard interval overlaps significantly. Therefore, the accurate length of guard interval cannot be detected.

Accordingly, the symbol start position difference detector 330 detects the difference between a current symbol start position detected by the

symbol start position detector 320 and a symbol start position delayed for at least 2 symbols. Here, the symbol delay 332 delays the symbol start position detected by the symbol start position detector 320 for a 2 symbol period in a best mode, to reliably detect the difference between the symbol  
5 start positions under the influence of noise and so on.

The subtractor 334 obtains the difference between the symbol start position output by the symbol delay 332 and the symbol start position output by the symbol start position detector 320. The symbol start position difference value output by the subtractor 334 is a position shift value at the  
10 symbol start position. The present invention uses only the size of the difference between the symbol start positions, so the absolute value calculator 336 calculates the absolute value of the output of the subtractor. The guard interval length detector 340 compares the symbol start position difference detected by the symbol start position difference detector 330 with  
15 a decision reference value prestored in a storage means such as a ROM, etc., and detects the length of a corresponding guard interval. Here, the decision reference value, used to decide the mode of the guard interval length, is set through an experiment. For example, the guard interval length detector 340 detects a guard interval length of a 1/32 mode when the  
20 difference between two symbol-delayed symbol start positions (between a previous symbol start position and the next symbol start position) is less than 20 samples (a 1/32 mode portion of FIG. 3). The guard interval length detector 340 detects a guard interval length of a 1/16 mode when the difference (distance) between the symbol start positions is between 100  
25 samples and 150 samples (a 1/16 mode portion of FIG. 3). The guard interval length detector 340 detects a guard interval length of a 1/8 mode when the difference (distance) between the symbol start positions is between 350 samples and 400 samples (a 1/8 mode portion of FIG. 3). The guard interval length detector 340 detects a guard interval length of a 1/8 mode  
30 when the difference between the symbol start positions is less than 1000 samples (a 1/4 mode portion of FIG. 3).

Information on the guard interval length of the guard interval length



detector 340 is output to the FFT window position controller 360, and simultaneously fed back to the symbol start position detector 320. The symbol start position detector 320 converts the existing guard interval length into a guard interval length newly input from the guard interval length  
5 detector 340, detects a symbol start position using the converted guard interval length information, and outputs the resultant value to the FFT window position controller 360.

Thus, the FFT window position controller 360 transfers an FFT window position using the guard interval length detected by the guard  
10 interval length detector 340 and the symbol start position information input from the symbol start position detector 320, and activates the fast Fourier transform (FFT), selecting only the useful data portion. The FFT 370 performs FFT on data generated by the ADC 310 according to an FFT window position control signal generated by the FFT window position  
15 controller 360, and outputs an OFDM signal which has been fast-Fourier-transformed.

#### Industrial Applicability

According to the present invention as described above, the lengths of  
20 various guard intervals are automatically detected in an OFDM receiver, thus performing accurate FFT window recovery.

What is claimed is:

1. A method of detecting the type of guard interval to recover a symbol start position in an orthogonal frequency division multiplexing (OFDM) receiver for receiving an OFDM symbol comprised of a useful data interval and a guard interval, the method comprising the steps of:

- (a) detecting the difference between a symbol start position of a received OFDM signal and a symbol start position delayed during at least two symbols; and
- (b) detecting the length of the guard interval by comparing the symbol start position difference detected by the step (a) to a predetermined guard interval decision reference value.

2. An apparatus for detecting the type of guard interval in an orthogonal frequency division multiplexing (OFDM) receiver for receiving an OFDM symbol comprised of useful data interval and a guard interval, to recover a fast Fourier transform (FFT) window position, the apparatus comprising:

- an analog-to-digital converter (ADC) for converting a received OFDM signal into digital complex samples;
- a symbol start position detector for detecting a symbol start position with reference to information on a guard interval length among the complex samples output by the ADC;
- a symbol start position difference detector for detecting the difference between the symbol start position detected by the symbol start position detector and a symbol start position delayed for a predetermined symbol time;
- a guard interval length detector for comparing the symbol start position difference detected by the symbol start position difference detector with a predetermined guard interval decision reference value and detecting the length of the guard interval; and
- an FFT window position controller for shifting the FFT window position using the guard interval length detected by the guard interval length detector

and the symbol start information detected by the symbol start detector, to activate an FFT at the shifted FFT window position.

3. The apparatus for detecting the type of guard interval in an  
5 OFDM receiver as claimed in claim 2, wherein the symbol start position difference detector comprises:

a symbol delay for delaying by two symbols the symbol start position detected by the symbol start position detector; and

a subtractor for calculating the difference between the symbol start  
10 position detected by the symbol start position detector and the symbol start position output by the symbol delay.

4. The apparatus for detecting the type of guard interval in an  
OFDM receiver as claimed in claim 3, wherein the symbol start position  
15 difference detector further comprises:

an absolute value calculator for calculating the absolute value of the symbol start position difference output by the subtractor.

5. The apparatus for detecting the type of guard interval in an  
20 OFDM receiver as claimed in claim 2, wherein the symbol start position detector detects an initial symbol start position when a guard interval length is set to be a 1/32 mode.

6. The apparatus for detecting the type of guard interval in an  
25 OFDM receiver as claimed in claim 2, wherein the symbol start position difference detected by the symbol start position difference detector is a symbol start position shifted value.

1/3

FIG. 1



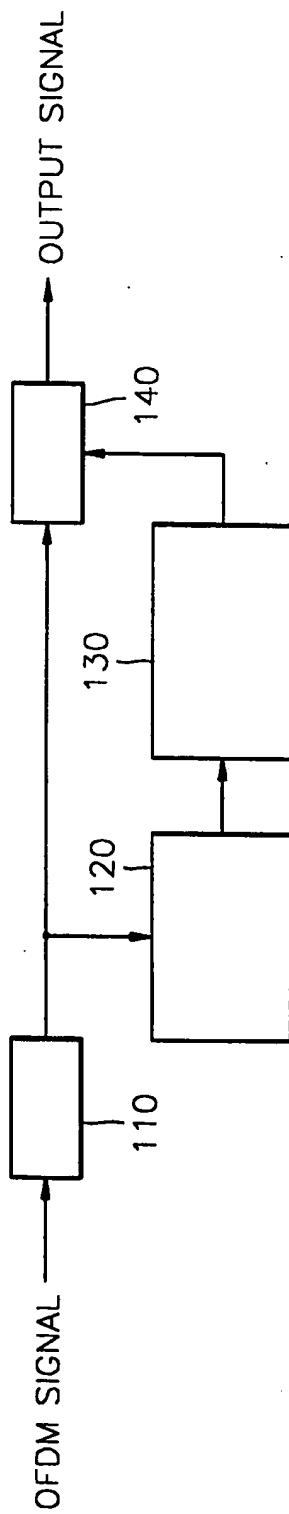


FIG. 2

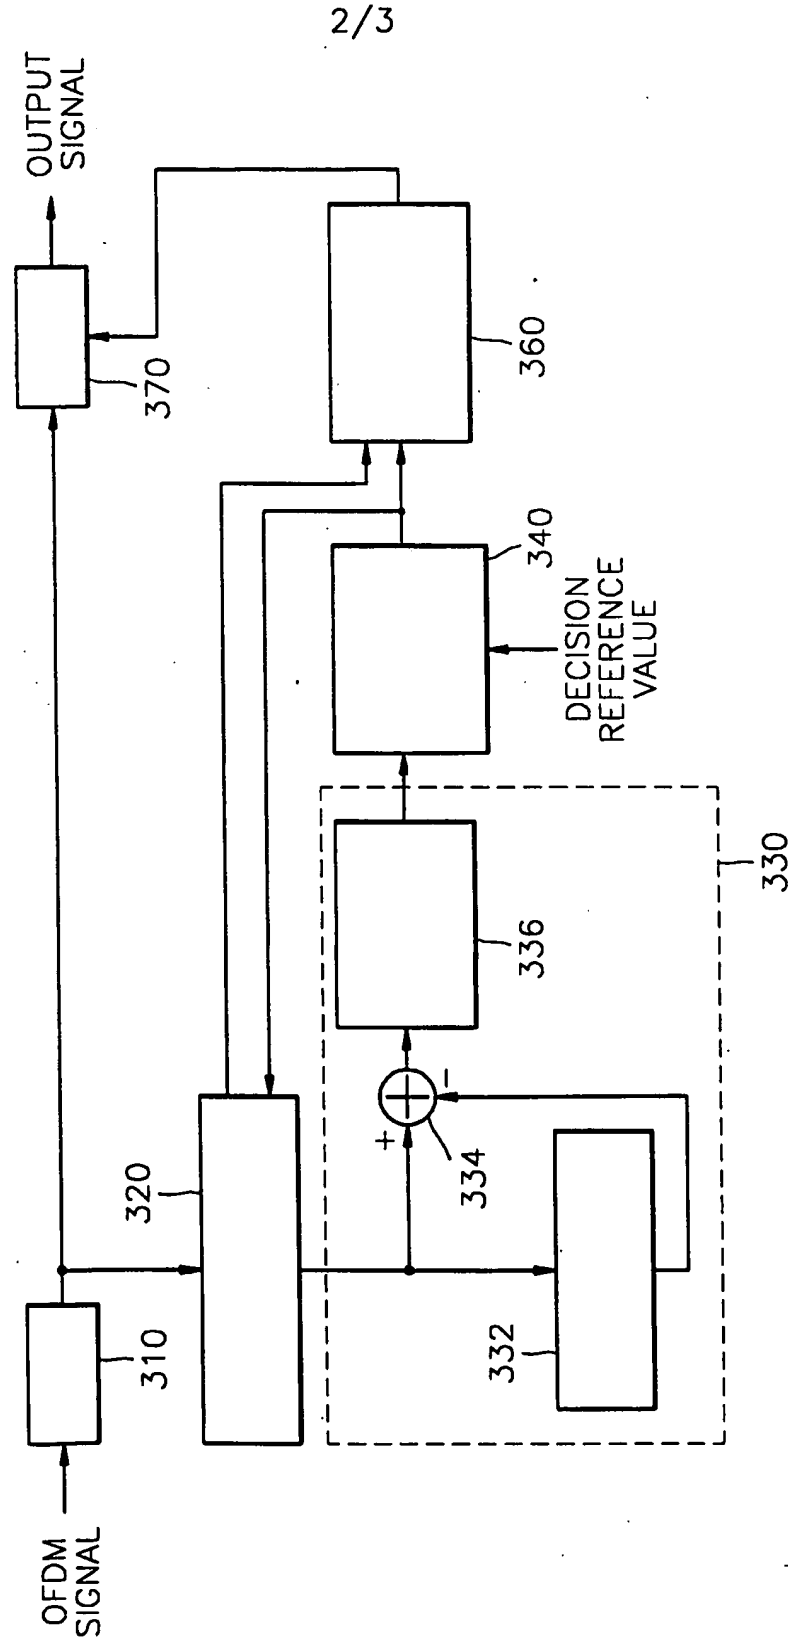

3/3

FIG. 3

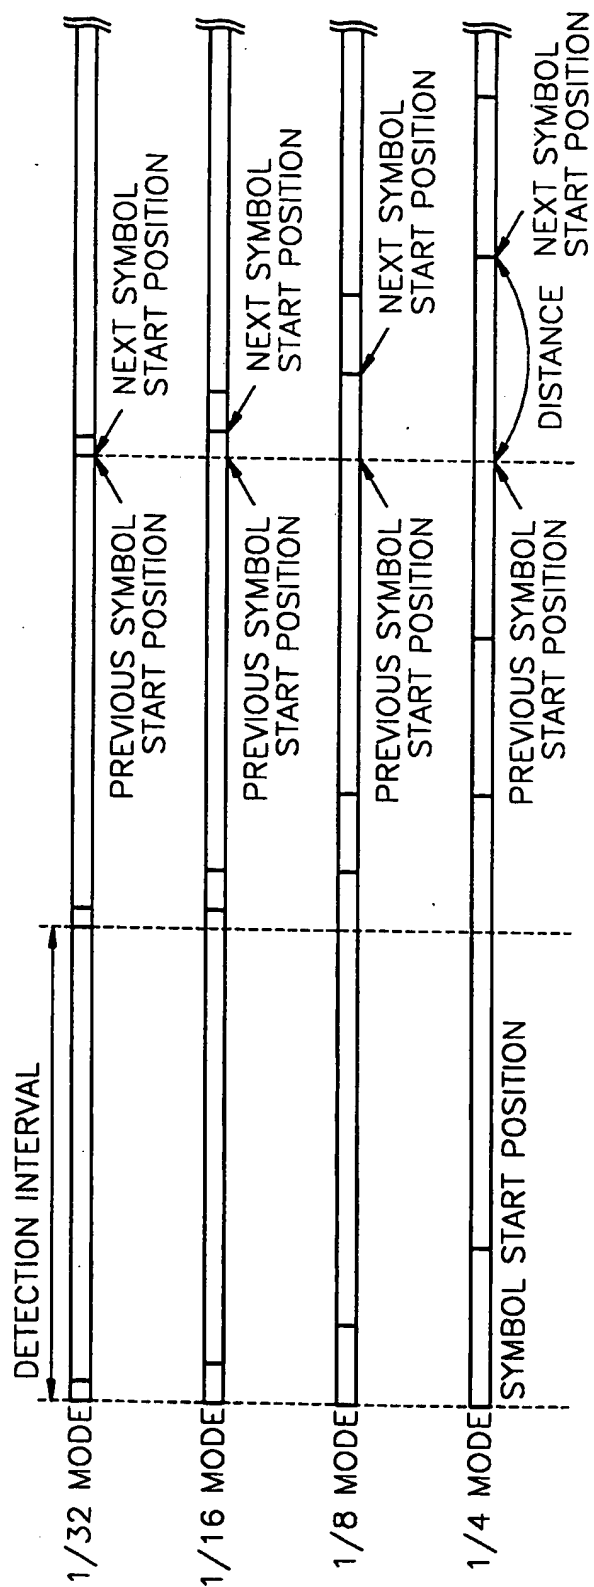

# INTERNATIONAL SEARCH REPORT

International application No.  
PCT/KR 98/00299

<b>A. CLASSIFICATION OF SUBJECT MATTER</b>		
IPC <sup>6</sup> : H 04 L 5/06; H 04 N 7/06		
According to International Patent Classification (IPC) or to both national classification and IPC		
<b>B. FIELDS SEARCHED</b>		
Minimum documentation searched (classification system followed by classification symbols)		
IPC <sup>6</sup> : H 04 L 5/06, 7/00, 27/26; H 04 N 7/06		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)		
WPI		
<b>C. DOCUMENTS CONSIDERED TO BE RELEVANT</b>		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0 772 332 A2 (BRITISH BROADCASTING) 07 May 1997 (07.05.97), abstract; fig.11.	1,2
A	US 5 652 772 A (ISAKSSON M. et al.) 29 July 1997 (29.07.97), abstract.	1,2
	----	
<input type="checkbox"/> Further documents are listed in the continuation of Box C. <input checked="" type="checkbox"/> See patent family annex.		
<p>* Special categories of cited documents:</p> <p>„A“ document defining the general state of the art which is not considered to be of particular relevance</p> <p>„E“ earlier application or patent but published on or after the international filing date</p> <p>„L“ document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>„O“ document referring to an oral disclosure, use, exhibition or other means</p> <p>„P“ document published prior to the international filing date but later than the priority date claimed</p> <p>„T“ later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>„X“ document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</p> <p>„Y“ document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</p> <p>„&amp;“ document member of the same patent family</p>		
Date of the actual completion of the international search		Date of mailing of the international search report
09 March 1999 (09.03.99)		17 March 1999 (17.03.99)
Name and mailing adress of the ISA/AT Austrian Patent Office Kohlmarkt 8-10; A-1014 Vienna Facsimile No. 1/53424/535		Authorized officer  Koskarti  Telephone No. 1/53424/326

Form PCT/ISA/210 (second sheet) (July 1998)

# INTERNATIONAL SEARCH REPORT

International application No.

PCT/KR 98/00299

Im Recherchenbericht angeführtes Patentedokument Patent document cited in search report Document de brevet cité dans le rapport de recherche	Datum der Veröffentlichung Publication date Date de publication	Mitglied(er) der Patentfamilie Patent family member(s) Membre(s) de la famille de brevets	Datum der Veröffentlichung Publication date Date de publication
EP A2 772332	07-05-97	GB A0 9524777	07-02-96
		GB A0 9622928	08-01-97
		GB A1 2307155	14-05-97
		GB A0 9522479	03-01-96
US A 5652772	29-07-97	WO A1 9503656	02-02-95
		EP A1 7125555	22-05-96
		SE A0 9302453	20-07-93
		SE A 9302453	17-10-94
		SE C2 500986	17-10-94